


Series M GC GX und GM Oil - water coolers



- high exchange efficiency
- equally distributed turbulent flow
- little installation space required
- high fatigue life
- low water consumption
- maintenance free
- broad temperature range
- easy installation

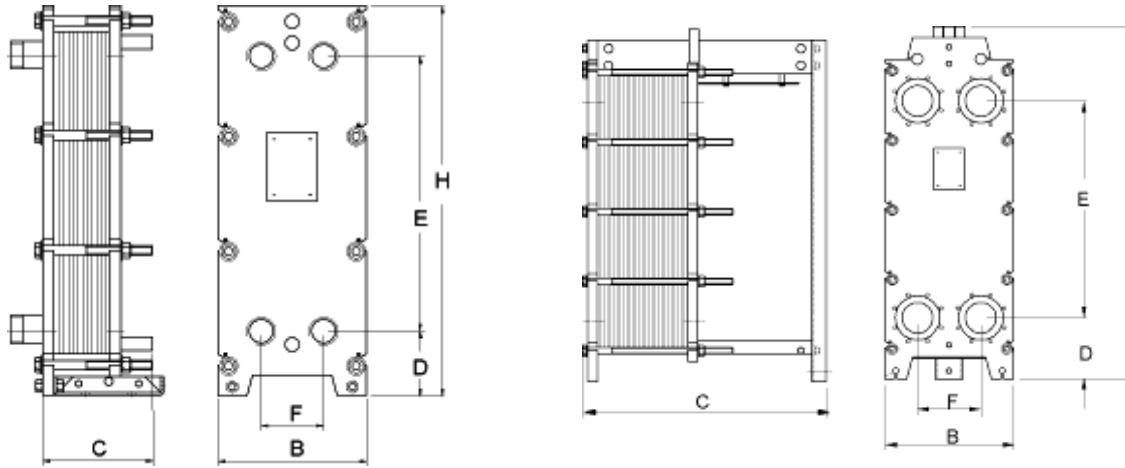

Technical data -Gasketed plate heat exchangers

Frame type PI

Frame type N and P

Frame	B	H	D	E	F	C min	C max	Max. surface m ²	Max. Flow m ³ /h	connection mm
GC- 12 PI	165	496	70	357	60	120	500	3	10	25
GX- 7 PI	160	745	52	640	60	130	510	7	10	25
GC- 28 PI	160	808	67	675	65	120	500	10	10	25
GC- 30 PI	250	693	90	555	100	250	375	5	27	40
GC- 30 P	250	693	90	555	100	590	1090	17	27	40
GX- 12 PI	320	840	140	592	135	260	385	6	40	50
GX- 12 P	320	840	140	592	135	600	1100	18	40	50
GX- 18 PI	320	1070	140	822	135	260	385	9	40	50
GX- 18 P	320	1070	140	822	135	600	1100	27	40	50
GX- 26 P	460	1265	220	779	226	717	3117	122	170	100
GC- 26 P	460	1265	220	779	226	717	3117	122	170	100
GX- 42 P	460	1675	220	1188	226	719	3119	200	170	100
GX- 51 P	630	1730	300	1143	300	1168	3168	250	380	150
GC- 51 P	630	1730	300	1143	300	1168	3168	250	380	150
GX- 64 P	626	1910	300	1320	285	1168	3168	295	380	150
GX- 91 P	626	2390	300	1800	285	1168	3168	416	380	150
GX- 118 P	626	2870	300	2280	285	1168	3168	540	380	150
GX- 60 P	825	1700	350	910	420	1518	3218	212	680	200
GX- 100 P	825	2280	350	1490	420	1518	3218	383	680	200
GX- 140 P	825	2860	350	2070	420	1518	3218	540	680	200
GX- 180 P	825	3440	350	2650	420	1518	3218	708	680	200
GX- 85 N/P	1060	1985	360	1140	570	1518	3218	365	1500	300
GX- 145 N/P	1060	2565	360	1720	570	1518	3218	613	1500	300
GX- 205 N/P	1060	3145	360	2300	570	1518	3218	830	1500	300

Standard material:

Plates: SS 1.4301, SS 1.440, Titanium, AVESTA SMO 254

Gaskets: NBR, EPDM, FPM Hypalon

Other materials like Hasteloy, Incoloy, other nickel alloys as well as palladium stabilised Titanium are available upon request.